


NOTE

- * : PRIMARY - MBM2147H IN LOC. 9B,9C,9D,9E,9J,9K
SUB - MBM2147E IN LOC. 9B,9C,9D,9E,9J,9K
- ** : PRIMARY - 74LS259 IN LOC. 12M
SUB - CD 4099 IN LOC. 11M
- T : 16 PIN SOCKET (4EA)
- TT : 18 PIN SOCKET (1EA)
- TTT : 24 PIN SOCKET (1EA)
- D1 - D5 : IN 914B
- R42 - R58 : 220 Ohm
- R69,70 : 1 Ohm 1/2 W
- CP24 - CP48, C8 - C24 : .1 MF AX. CER.
- C35 : 1 MF TANT
- RM7,13,14,15 : 1 K 9 OR 10 PIN SIP
- RM8,10,12 : 1 K 6 PIN SIP
- UNIT UNMARKED CAPS ARE MF & ALL CAPS ARE AX. TYPE
- ALL RESISTOR UNIT Ohm
- C5,6 - MYLAR CAPS
- XXX : THIS LOCATION CAN UTILIZE EITHER
(A) CUSTOM CHIP NVC 293
OR (B) PLUG IN P.C. A082-91388-A000
VIDEO SHIFTER (293)

M051-00935-C030

DO NOT SCALE DWG.	HEAT TREAT	SCALE	USED ON RALLY - X	MIDWAY MFG. CO. FRANKLIN PK. ILL.
DIM TOLERANCES UNLESS SPECIFIED	MAT'L	NO. REQ'D PER	PART NO.	
CONCENTRICITY T I R .003	FINISH	ASS'Y DRAWING	A082-91385-C000	
FRACTIONAL * 1/64		LOGIC BD I		
DECIMAL .003				
MOLE DIA + .002 - .000	DATE 12/8/80			

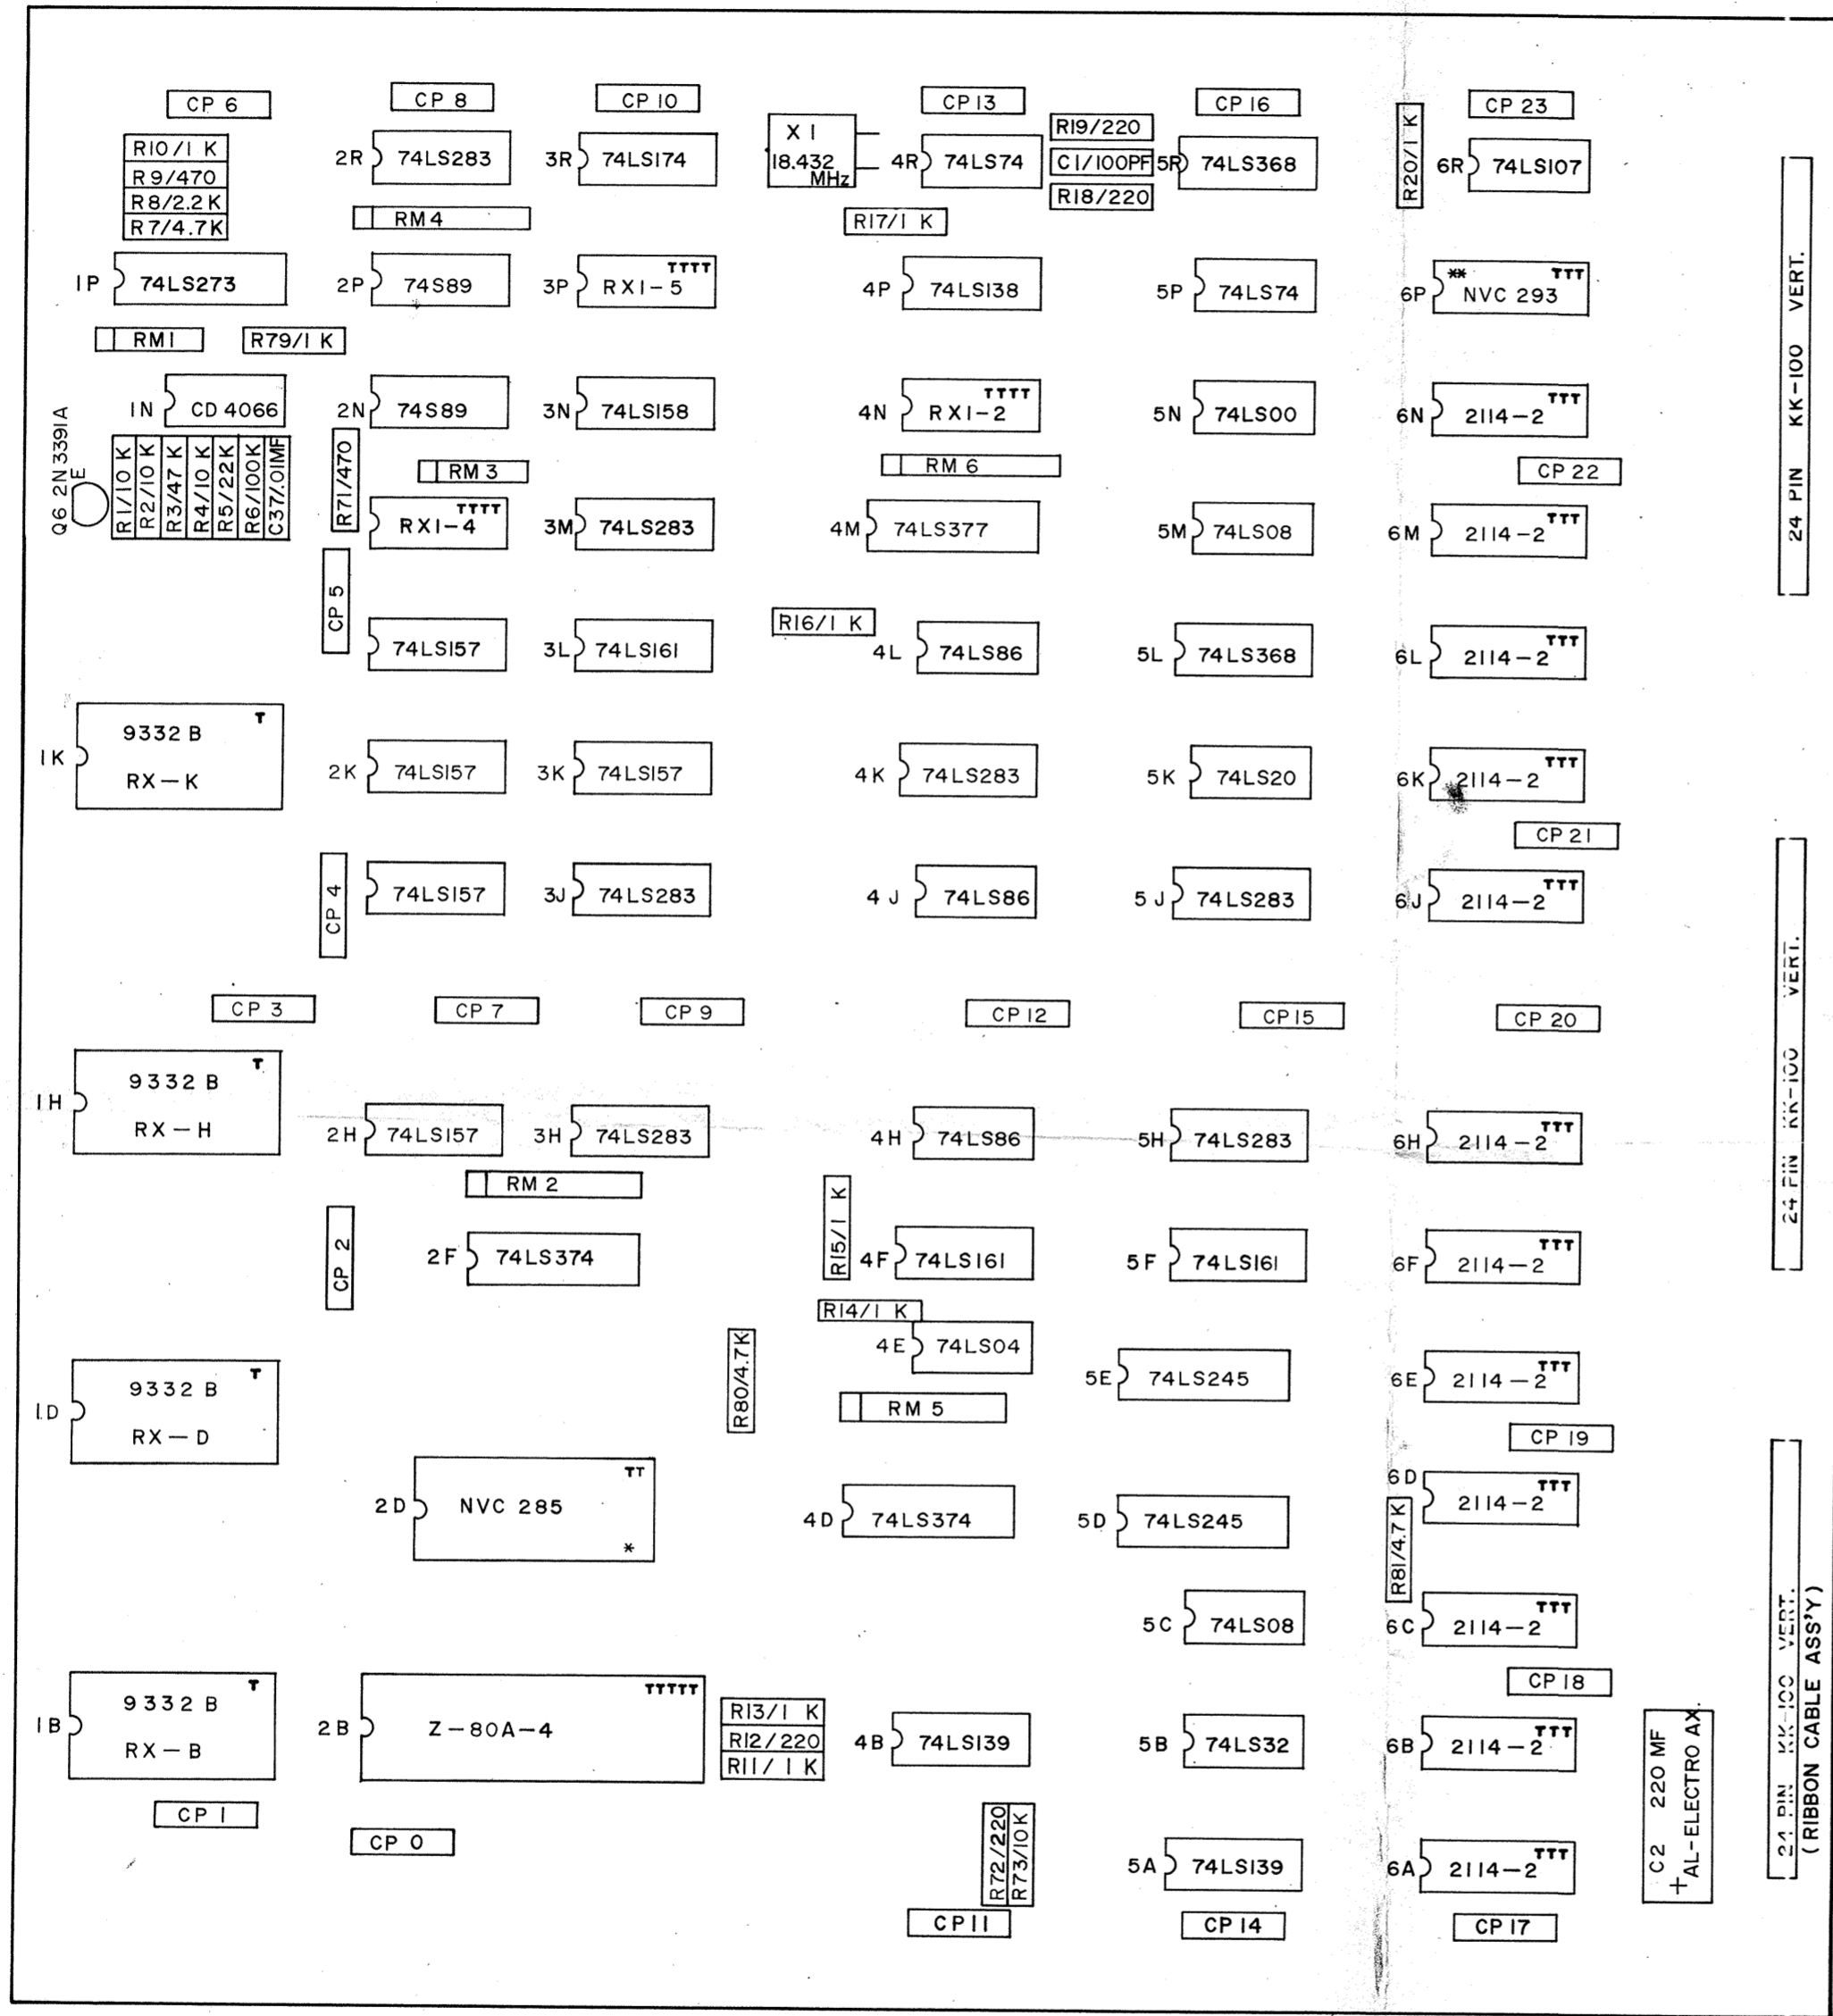

NOTE :
T : 24 PIN SOCKET (4 EA)
TT : 28 PIN SOCKET (1 EA)
TTT : 18 PIN SOCKET (13 EA)
TTTT : 16 PIN SOCKET (3 EA)
TTTTT : 40 PIN SOCKET (1 EA)

CP 0 - CP 23 : .1 MF AX. CER.
RM 2, 4, 5, 6 : 1 K 9 OR 10 PIN SIP RESISTOR.
RM 1, 3 : 1 K 6 PIN SIP RESISTOR.

ALL CER. CAPS ARE AX. TYPE.
RESISTOR UNIT : OHM

RICHO 3/4" STAND-OFF

* NOTE : THIS LOCATION CAN UTILIZE EITHER
(A) CUSTOM CHIP NVC 285
OR (B) PLUG IN P.C. A082-91383-B000
Z-80 SYNC BUSS CONTROLLER (285)

** NOTE : THIS LOCATION CAN UTILIZE EITHER
(A) CUSTOM CHIP NVC 293
OR (B) PLUG IN P.C. A082-91388-A000
VIDEO SHIFTER (293)

M051-00935-C029		USED ON RALLY-X	REVISIONS
DO NOT SCALE DWG.		NO. REQ'D 1 PER	MIDWAY MFG. CO. FRANKLIN PK. ILL.
HEAT TREAT		PART NO.	
DIM. TOLERANCES UNLESS SPECIFIED		ASS'Y DRAWING	
CONCENTRICITY T I R .003		LOGIC BD II	
FRACTIONAL .1/64		PART NO. A082-91387-C000	
DECIMAL .005			
HOLE DIA +.002-.000			
DATE 12/9/80			