




Kurz-Kasch, Inc.
Electronics Division
Box 1246
2876 Culver Ave.
Dayton, Ohio 45401
Telephone (513) 296-0330

Operating Instructions For Model 1000

Test Fixture Test Set

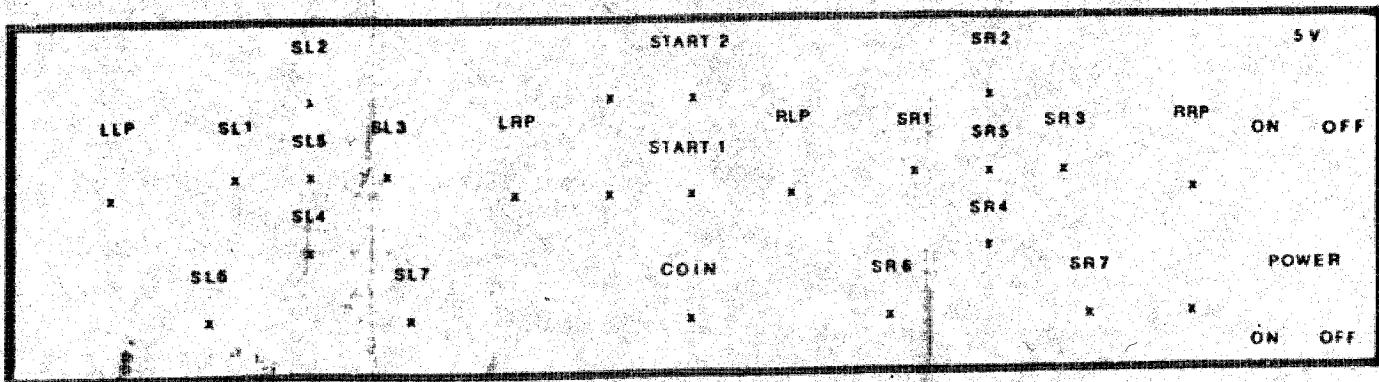

1. Insert 1000 A/B card into program "A" connector, number side up.
2. Insert 1000G card into test fixture with number side up.
3. Slide 5 VOLT switch to ON.
4. Slide POWER switch to ON.
5. All red L.E.D.'s should be on and the green L.E.D.'s should be off.
6. Turn each of the potentiometers back and forth and see that the corresponding L.E.D. is bright when the pot is at the end and the L.E.D. is dim when the pot is midrange.
7. Push switches SL-1 through SL-7, one at a time. The red L.E.D. marked SL will go out and the green L.E.D. will come on as each switch is pushed.
8. Push COIN, START 1 and START 2 switches one at a time. The red L.E.D. marked SC will go out and the green L.E.D. will come on as each switch is pushed.
9. Push switches SR-1 through SR-7, one at a time. The red L.E.D. marked SR will go out and the green L.E.D. will come on as each switch is pushed.
10. Slide the POWER switch to OFF.
11. Remove the 1000 A/B card from the program "A" connector and insert it into the program "B" connector.
12. Repeat steps 2 - 10.